

PACER®

6 VOLT / P-305

CAPACITY 300 Ah
MATERIAL Polypropylene
BATTERY Deep-Cycle Flooded/Wet Lead-Acid Battery
COLOR Black
WATERING Required



ELECTRICAL SPECIFICATIONS

VOLTAGE	6			
CELL[s]	3			
CAPACITY ^A MINUTES	155 @ 75 AMPS			
CAPACITY ^B AMP-HOURS [Ah]	5	10	20	100
	244	273	300	331
ENERGY [kWh]	1.99 @ 100 Hr			

CHARGING INSTRUCTIONS

CHARGER VOLTAGE SETTINGS [AT 77°F/25°C]					
SYSTEM VOLTAGE	6V	12V	24V	36V	48V
Bulk Charge	7.41	14.82	29.64	44.46	59.28
Float Charge	6.75	13.50	27.00	40.50	54.00
Equalize Charge	8.10	16.20	32.40	48.60	64.80
Do not install or charge batteries in a sealed or non-ventilated compartment. Constant under or overcharging will damage the battery and shorten its life as with any battery.					

PHYSICAL SPECIFICATIONS

BCI	902		
MODEL	P-305		
TERMINAL TYPE ^C	EMBEDDED UNIVERSAL TERMINAL REVERSE		
DIMENSIONS ^D INCHES [mm]	LENGTH 12.35 [314]	WIDTH 6.85 [174]	HEIGHT ^E 14.41 [366]
WEIGHT ^F LBS. [kg]	82 [37.2]		
HANDLE	ROPE HANDLE		
INSTALLATION ORIENTATION	VERTICAL/UPRIGHT		

CHARGING TEMPERATURE COMPENSATION

ADD	SUBTRACT
0.005 volt per cell for every 1°C below 25°C 0.0028 volt per cell for every 1°F below 77°F	0.005 volt per cell for every 1°C above 25°C 0.0028 volt per cell for every 1°F above 77°F

OPERATIONAL DATA




OPERATING TEMPERATURE	SELF DISCHARGE
-4°F to 113°F [-20°C to +45°C]. At temperatures below 32°F [0°C] maintain a state of charge greater than 60%.	5 – 15% per month depending on storage temperature conditions.

STATE OF CHARGE MEASURE OF OPEN-CIRCUIT VOLTAGE

PERCENTAGE CHARGE	SPECIFIC GRAVITY	CELL	6 VOLT
100	1.277	2.122	6.37
90	1.258	2.103	6.31
80	1.238	2.083	6.25
70	1.217	2.062	6.19
60	1.195	2.040	6.12
50	1.172	2.017	6.05
40	1.148	1.993	5.98
30	1.124	1.969	5.91
20	1.098	1.943	5.83
10	1.073	1.918	5.75

 **Made in
USA**
of U.S. and imported parts


BATTERY DIMENSIONS

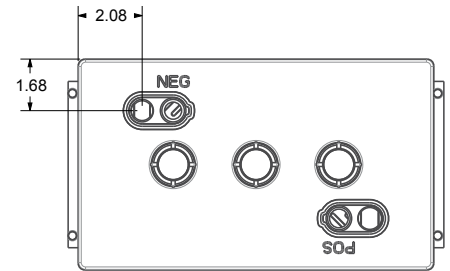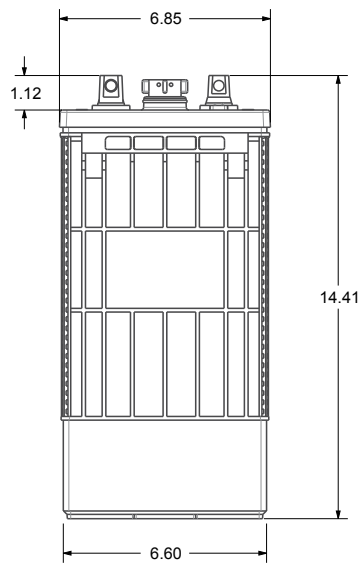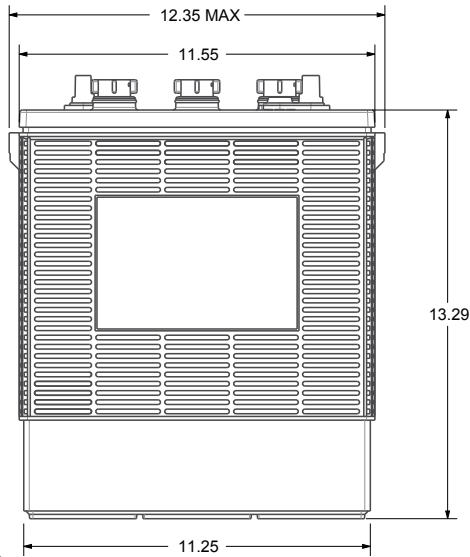


TERMINAL SPECIFICATIONS^C

TYPE	EUTR
DESCRIPTION	EMBEDDED UNIVERSAL TERMINAL REVERSE
HEIGHT INCHES [mm]	1.10 [28]
TORQUE POUNDS [Nm]	95-105 [11-12]
BOLT	HOLE SIZED FOR 5/16" -18 BOLT

PERFORMANCE

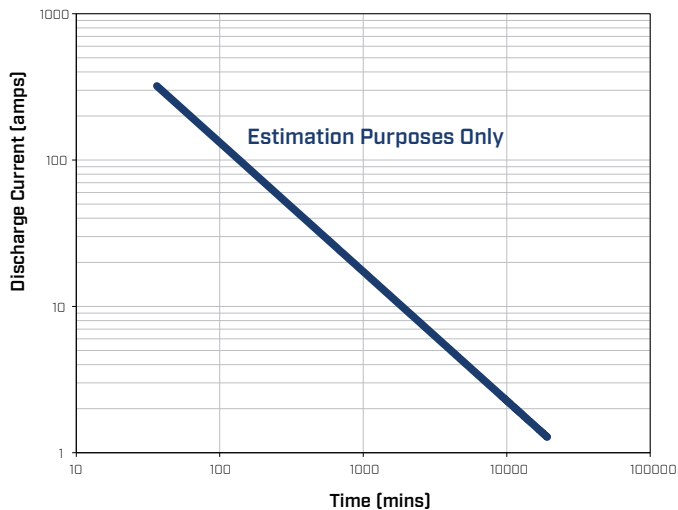

PERCENT CAPACITY VS. TEMPERATURE

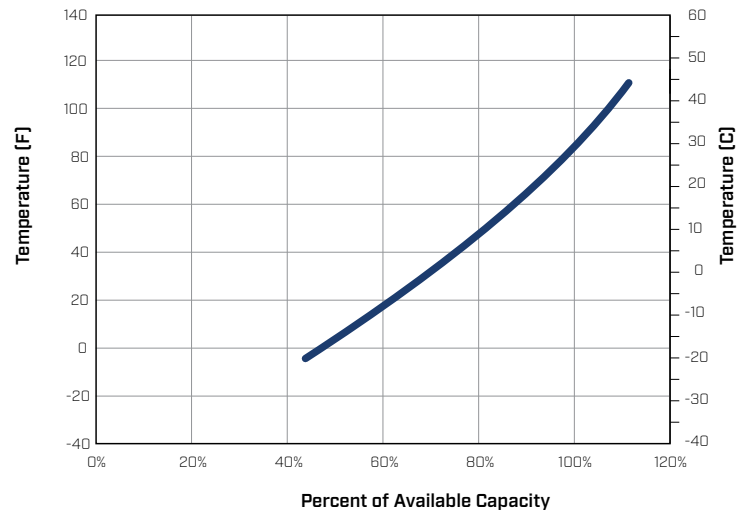

Manufactured with Quality System
Certified by Pacer Battery Company

Designed in compliance with applicable BCI standards.
Tested in compliance to BCI standards.



- A. The number of minutes a battery can deliver when discharged at a constant rate at 80°F (27°C) and maintain a voltage above 1.75 V/cell. Capacities are based on peak performance.
- B. The amount of amp-hours (Ah) a battery can deliver when discharged at a constant rate at 80°F (27°C) and maintain a voltage above 1.75 V/cell. Capacities are based on peak performance.
- C. Terminal images are representative only.

- D. Dimensions may vary depending on type of handle or terminal. Batteries should be mounted with 0.5 inches (12.7 mm) spacing minimum.
- E. Height taken from bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal.
- F. Weight may vary.

P2025004-P-305-Pacer-Datasheet



©2025 PACER BATTERY COMPANY. ALL RIGHTS RESERVED. PACER BATTERY COMPANY IS NOT LIABLE FOR DAMAGES THAT MAY RESULT FROM ANY INFORMATION PROVIDED IN OR OMITTED FROM THIS PUBLICATION, UNDER ANY CIRCUMSTANCES. PACER BATTERY COMPANY RESERVES THE RIGHT TO MAKE ADJUSTMENTS TO THIS PUBLICATION AT ANY TIME, WITHOUT NOTICE OR OBLIGATION. REVISED: 12/11/24